

# ParMax™ Filter Cartridges

## ■ Large Diameter High Flow Elements

### High Flow Series

## ParMax™ High Flow Cartridge

The best of pleated and large diameter technologies are combined in Parker's ParMax high flow filter cartridges. The unique layered construction provides excellent retention across a wide range of flux rates. One six inch diameter cartridge can handle up to 500 gpm flow (60" length). The inside to outside flow allows for a high contaminant holding capacity and a long filter life which makes the ParMax an ideal choice for a wide variety of critical process applications.

ParMax cartridges are available with polypropylene and microfiberglass media in absolute (99.98%) micro ratings from 1 to 90 microns.

### Applications

- Process Water
- Power Generation
- Specialty chemicals
- Food and Beverage



### Features and Benefits

- Large diameter yields much higher flow rates compared to traditional 2.5" filters.
- High flow capacity allows for fewer elements and less capital expenditure.
- Inside-out flow pattern ensures positive capture of contaminants.
- Absolute retention ratings for critical filtration.
- All materials listed as acceptable for potable and edible contact according to CFR Title 21.
- Manufactured with strict quality control.
- Parker Process Filtration Division is an ISO9001:2000 Certified Division.

## Process Advanced Filtration Division



# High Flow Series

## Specifications

### Materials of Construction:

- Media: RCP - Polypropylene  
RMG - Microfiberglass
- Support/Drainage: Polypropylene
- Hardware: Polypropylene
- O-Rings (SOE): EPR, Buna-N, Viton\*, Silicone

### Retention Ratings (99.98%):

- 1, 3, 4.5, 10, 20, 30, 40, 90\*\*

### Maximum Operating Conditions:



- Maximum Temperature:  
176°F (80°C) @ 30 psid (2.1 bar)
- Maximum Differential Pressure:  
70 psi (4.8 bar) @ 77°F (25°C)  
30 psi (2.1 bar) @ 176°F (80°C)

### Recommended Operating Conditions:

- Flow Rate:  
Up to 175 gpm (662 LPM)/20" element  
Up to 350 gpm (1325 LPM)/40" element  
Up to 500 gpm (1892 LPM)/60" element
- Change-out Pressure:  
35 psid (2.41 bar)

### Dimensions (nominal):

- Outside Diameter: 6.5" (16.51 cm)
- Inside Diameter: 2.5" (6.35 cm)

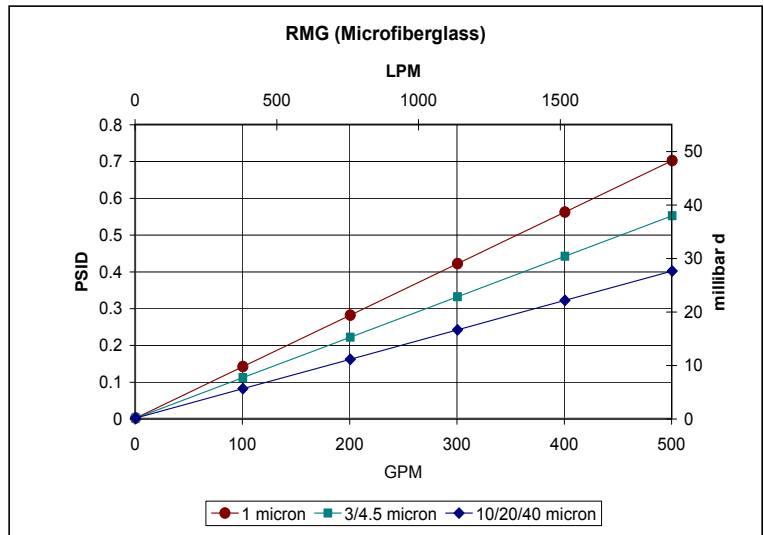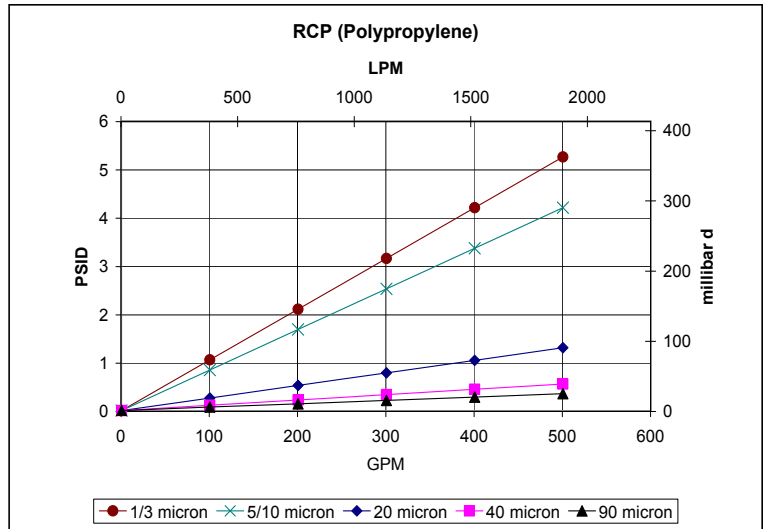

## Ordering Information

RCP	100	—	20
Cartridge Code	Pore Size (µm)		Length
RCP = Polypropylene	010 = 1.0		20 = 20" (50.8 cm)
RMG = Glass	030 = 3.0		40 = 40" (101.6 cm)
	045 = 4.5		60 = 60" (152.4 cm)
	100 = 10		
	200 = 20		
	400 = 40		
	900 = 90 **		

E	PP
Seal Material	End Cap Configuration
E = EPR	PP = 435 O-Ring/Closed
N = Buna-N	
V = Viton*	
S = Silicone	

\* Trademark of E. I. duPont de Nemours & Co.

\*\* Available only in the CP version

## Process Advanced Filtration Division

Parker Hannifin Corporation  
Process Advanced Filtration Division  
2340 Eastman Avenue  
Oxnard, CA 93003  
Toll Free 1-877-784-2234  
Telephone (805) 604-3400  
Fax (805) 604-3401  
<http://www.parker.com/processfiltration>

